

## LAWN AND LEAF COLLECTION PRODUCTS

### Residential



Tractor Vacuum

#### Flex-Tube® PV

(Medium Weight)

Coextruded Clear PVC hose with rigid black PVC helix

- Economical
- Ultra smooth interior, crush resistant
- OEM lengths and colors available
- Wall thickness .035"

Size ..... 4", 5", 6", 7", 8", 10", 12"  
 Length ..... 12', 25'  
 Temp Range ..... -20° to 160°



#### Flex-Tube® PU

(Medium Weight)

Coextruded clear thermoplastic ether based polyurethane with rigid yellow ABS helix

- Great abrasion resistance
- Ultra smooth interior, crush resistant
- Puncture and tear resistant
- OEM lengths and colors available
- Wall thickness .035"

Size ..... 4", 5", 6", 7", 8", 10", 12"  
 Length ..... 12', 25'  
 Temp Range ..... -40° to 200°



#### Flex-Tube® Bridge Clamps

Specially designed stainless steel band and welded stainless steel bridge with carbon steel screw

- Fits over helix creating a leak proof seal
- Available in sizes 4" to 12"



### Commercial/Landscaping



Truck Loaders

#### Flexadux® LCDC

(Medium Weight)

High performance polypropylene blend hose reinforced with a spring steel wire helix and external polypropylene wearstrip

- Economical
- Light weight, drag resistant
- Long flex life with good abrasion and tear resistance
- Wall thickness .032"

Size ..... 8", 10", 12"  
 Length ..... 10', 25'  
 Temp Range ..... -30° to 200°



#### Flexadux® HT-W

(Heavy Weight)


Thermoplastic rubber hose reinforced with a spring steel wire helix and external polypropylene wearstrip

- Great moisture and UV resistance
- External wearstrip offers additional drag resistance
- Puncture and tear resistant
- Wall thickness .045"

Size ..... 8", 10", 12"  
 Length ..... 10', 25'  
 Temp Range ..... -60° to 275°



### Municipal Loaders

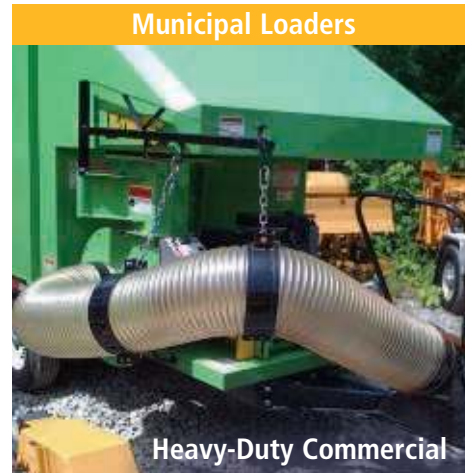

Heavy-Duty Commercial

#### Flx-Thane® HD

(Heavy Weight)

Polyurethane hose reinforced with a bronze coated spring steel wire helix

- Superior abrasion resistance & tear strength
- Ideal for leaf and debris collection
- Great moisture and UV resistance
- Excellent flexibility
- Also available in translucent blue
- Wall thickness .045"

Size ..... 12", 14", 16", 18"  
 Length ..... 10', 25'  
 Temp Range ..... -65° to 200°



#### Flx-Thane® VHD

(Very Heavy Weight)

Polyurethane hose reinforced with a bronze coated spring steel wire helix

- Great abrasion resistance & higher tear strength
- Severe service & debris collection
- Great moisture and UV resistance
- Also available in translucent blue
- Wall thickness .060"

Size ..... 12", 14", 16", 18"  
 Length ..... 10', 25'  
 Temp Range ..... -65° to 200°



**WARNING:** California Residents: Cancer and Reproductive Harm www.P65Warnings.ca.gov.



A SCHAUBENBURG HOSE TECHNOLOGY COMPANY

**All Leaf Collection Hoses In Stock for the Season!**